


Continuous Plastic Spacer (TricTrac)

Description

A versatile continuous plastic spacer designed for use on horizontal and vertical surfaces. The spacer supports mesh or reinforcement in suspended slabs. Suitable for use on metal decking. Lateral cut-outs and holes enable a free flow of the concrete.

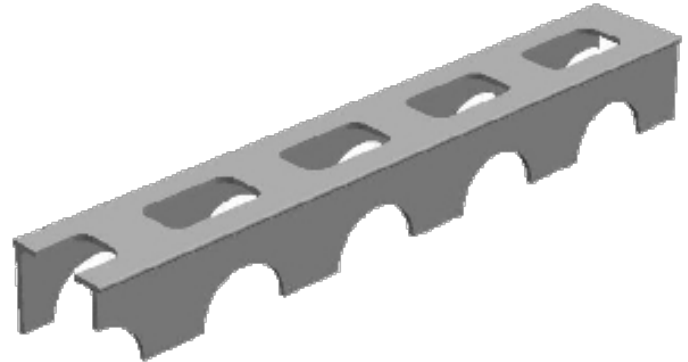

Sizing & Packing

Product Code	Concrete Cover (mm)	Length (mt)	Pack (mt)	Pallet (mt)
CPS/TT/15/2	15	2	100	6600
CPS/TT/20/2	20	2	100	6300
CPS/TT/25/2	25	2	100	4900
CPS/TT/30/2	30	2	100	4200
CPS/TT/35/2	35	2	60	3600
CPS/TT/40/2	40	2	60	2400
CPS/TT/45/2	45	2	60	1440
CPS/TT/50/2	50	2	60	1680
CPS/TT/60/2	60	2	40	1200
CPS/TT/70/2	70	2	40	1120
CPS/TT/75/2	75	2	40	1120
CPS/TT/80/2	80	2	40	1120

Specification

Requirement	Description	Result
6.2	Min 25% Voids	Pass
7.3	+ - 2mm Tolerance	Pass
7.72	Breadth / Height Ratio	Pass
9	Max deflection of 1mm Under 0.5kn test load	Pass
11	Marking of packs	Pass

In accordance with the requirements of 'Spacers and chairs for steel reinforcement and their specification' the above products have been supplied and comply with the requirements of British Standard BS7973-1:2001

Note: In the absence of a specific harmonised European standard (hEN) or European Technical Approval (ETA), a CE Mark is not required.

Unit 51, Portmanmoor Road Ind Est,
Ocean Park, Cardiff, CF24 5HB