


Solco Clay Air Bricks & Liners

Description

Solco Clay Airbricks can be used internally or externally in the construction of housing and commercial projects.

Terracotta Airbricks can complement the external finish of a property and will weather well with the surrounding brickwork.

Cavity Liners are used in conjunction with Airbricks, to bridge the depth of the wall, where necessary.

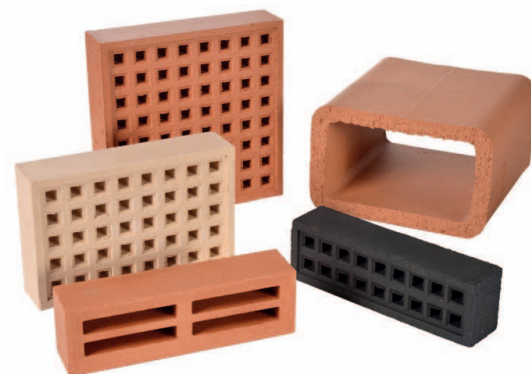


Benefits

- Components are suitable for new build and refurbishment projects.
- Available in red, buff and blue/black.
- Colours resistant to fading.
- Airbricks are resistant to frost and the freeze/thaw cycle.
- Complement the building finish.
- Holes sized to prevent vermin entry.


Product Selector – Airbricks

Square Hole

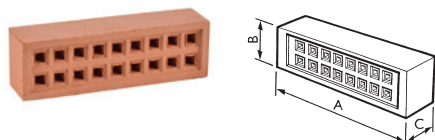


Cat No	A mm	B mm	C mm	Free Air Space mm ²
YA13	215	65	50	1300
YA14	215	140	50	2890
YA15	215	215	50	4624

Louvered Hole

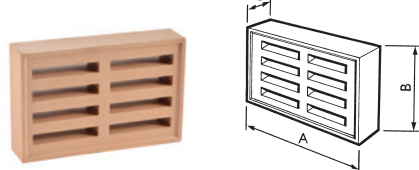

Cat No	A mm	B mm	C mm	Free Air Space mm ²
YA16	215	65	50	1290
YA17	215	140	50	2580

Cavity Liners

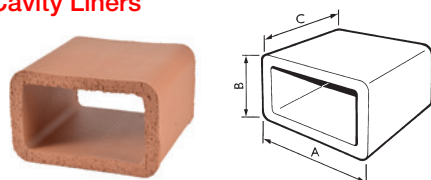

Cat No	A mm	B mm	C mm
YB11	215	65	200
YB13	215	140	200
YB15	215	215	200

Standards and Colours

Solco Airbricks and Liners comply with BS 493: 1995 'Specification for Airbricks and gratings for wall ventilation'

Available in a choice of colours : Terra Cotta, Buff & Blue/Black

Solco, Unit 51, Portmanmoor Road Industrial Estate, Ocean Park, Cardiff, CF24 5HB