

TECHNICAL INFORMATION

ULTRA HIGH STRENGTH CONSTRUCTION GROUT

Product Data Sheet

DESCRIPTION

Pozament Ultra High Strength Construction Grout (Previously Cemrok Easiflow ExCeL) is a non-shrink, extremely high strength cementitious grout comprising of low alkali high specific area Portland cements and other cementitious binders combined with high purity aggregates and a system of compatible admixtures to achieve high in service performance. This grout has high flow characteristics to achieve penetration and levelling with no bleed and zero shrinkage when placed at 0.22 water solid ratio.

USES

Pozament Ultra High Strength Construction Grout has been specifically designed to provide a high strength fluid grout for pouring into and under stanchion plates, machine base plates, parapet rails, for supporting bridge bearings and for filling ducts in post tensioned and pre-stressed structures.

KEY PROPERTIES

- Independently tested by a UKAS Laboratory for compliance with D.o.T. Highways Agency Spec. 2601 for "Bedding Mortars"
- Equivalent Sodium Oxide is less than 3.0kg/m³.
- High ultimate strength. • Shrinkage compensated.
- Can be used for grouting sections up to 100mm thick.
- Chloride free. • High fluidity – can be pumped or poured. • Complies with U.S. Corps of Engineers Specification CRD-C 621.

MIXING INSTRUCTIONS

The grout should be mixed using water that complies with BS EN 1008 (as for concrete). It should be mixed in a suitable container using either an electric (1kW) or pneumatic power tool. Larger amounts can be mixed in a forced action paddle mixer.

For more details contact:
 03444 630 046 specialistproducts@tarmacbp.co.uk

TARMAC.COM

20kg of the grout powder should be added carefully to 4.4 litres of water, progressively mixing until a fluid grout consistency is achieved.

Small quantities can be mixed by hand, care being taken to accurately measure the water.

Once mixed, the material must not be reworked.

PERFORMANCE DATA

Water Addition (per 20kg)	4.4 Litres
Initial set time	160 mins
Final set time	200 mins
Flow ring @ 0 min (65d x 40h)	170-240mm
Colcrete flow channel	500-700mm
Pot Life	Approx. 30mins

Yield per 20kg	
Kg powder per m ³	1740 kg
20kg bags per m ³	87 bags
Litres per 20kg bag	11.5 Litres

	Compressive Strength	Flexural Strength
1 day	35 N/mm ²	4.5 N/mm ²
7 day	65 N/mm ²	9 N/mm ²
28 day	80 N/mm ²	11 N/mm ²
90 day	92 N/mm ²	11.5 N/mm ²

Modulus of Elasticity @28 days	26 GPa
--------------------------------	--------


Data is sourced from tests performed in controlled laboratory conditions at 18-20°C.

QUALITY CONTROL

All Pozament products are factory blended, tested and packaged to quality control procedures in accordance with BS EN ISO 9001.

The information supplied in our literature or given by our employees is based upon extensive knowledge and experience. This information, together with that supplied by our agents or distributors, is given in good faith in order to help you. Our Company policy is one of continuous Research and Development; we therefore reserve the right to update this information at any time without prior notice. We also guarantee the consistent high quality of our products; however, as we have no control over site conditions or the execution of the work, we accept no liability for any loss or damage which may arise as a result thereof. Country specific recommendations, depending on local standards, codes of practice, building regulations or industry guidelines, may affect specific installation recommendations. Any existing intellectual property right must be observed. Tarmac's standard terms and conditions apply.

Shutter detail for pouring Pozament Ultra High Strength Construction Grout

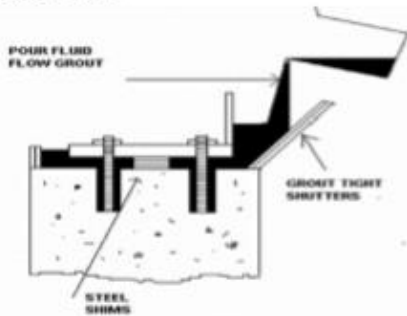

Set grout should be chamfered to ensure that unrestrained shrinkage cracking does not occur.

APPLICATION AND PLACING

Pozament Ultra High Strength Construction Grout can either be poured or pumped into position. Due to the relatively short pot life pumped operations must be executed quickly particularly in warm weather conditions.

For best results the grout should be placed immediately on completion of mixing. Ensure all surfaces with which the grout will come into contact are clean and dust free. Ideally, concrete substrates should be thoroughly soaked for several hours prior to the grout being applied to reduce suction.

Permeable concrete should be treated with a suitable concrete primer such as Acrylic Primer. Shutters must be impermeable to the passage of water and both strong enough and sufficiently supported to contain the placed grout. When gravity placed, sufficient hydrostatic head must be given and grout volume maintained to enable the material to flow completely through the void to be filled from one side of shutter only. A minimum 50mm head is recommended. Immediately prior to placement all excess water should be removed. Any grout exposed to wind or drying conditions should be suitably protected, preferably by coating with a wax-free Curing Agent.

Any grout that is likely to be subject to low temperature immediately after placing or during its early strength development should be protected by covering with hessian or other insulative material. For concreting in cold weather reference should be made to BS8110 Pt. 1 Section 6.

CLEAN UP AND SPILAGES

Dry powders should be swept up and disposed of in accordance with the Local Authority.

For more details contact:

03444 630 046 specialistproducts@tarmacbp.co.uk

TARMAC.COM

PACKAGING AND STORAGE

Pozament Ultra High Strength Construction Grout is available in nominal 20kg sacks, palletised and shrink wrapped.

Pozament Ultra High Strength Construction Grout may also be available in Intermediate Bulk Containers or in Bulk Powder Tankers.

Palletised **Pozament Ultra High Strength Construction Grout** should be stored in cool dry areas clear of the ground, sheeted or under cover and stacked not more than two pallets high. The product should be used on a first in – first out basis. Shelf life is 6 months in paper bags and 12 months in plastic bags (from the date shown on the bag). Subject to correct storage conditions.

HEALTH & SAFETY

Health and safety advice, which must be followed, can be found on the Material Safety Data Sheet. Users are advised to wear face mask, goggles, gloves and overalls when handling, mixing and applying cementitious products.

Contains Portland Cement Contains Chromium (VI), which may produce an allergic reaction. Clothing contaminated by wet cement should be removed immediately and washed before reuse. R38 - Irritating to skin. R41 - Risk to serious damage to eyes. S26 - In case of contact with eyes, rinse immediately with water and seek medical advice. S37/39 - Wear suitable gloves and eye/face protection. S2 - Keep out of reach of children.

The information given in this technical data sheet is based on our current knowledge and is intended to provide general notes on our products and their uses. Tarmac endeavour to ensure that the information given is accurate, but accept no liability for its use or its suitability for particular application because of the product being used by the third party without our supervision. Any existing intellectual property right must be observed.

INFORMATION, PRICES & ORDERING

For technical information, pricing and to place orders contact our Sales Office on the following:

Telephone: 03444 630 046

Email: pozament@tarmacbp.co.uk

Visit our website: Pozament.co.uk

Tarmac Building Products Ltd. Swains Park Industrial Estate, Park Road, Overseal, Swadlincote, Derbyshire, DE12 6JT.

The information supplied in our literature or given by our employees is based upon extensive knowledge and experience. This information, together with that supplied by our agents or distributors, is given in good faith in order to help you. Our Company policy is one of continuous Research and Development; we therefore reserve the right to update this information at any time without prior notice. We also guarantee the consistent high quality of our products; however, as we have no control over site conditions or the execution of the work, we accept no liability for any loss or damage which may arise as a result thereof. Country specific recommendations, depending on local standards, codes of practice, building regulations or industry guidelines, may affect specific installation recommendations. Any existing intellectual property right must be observed. Tarmac's standard terms and conditions apply.