

# Solco SBP-019 Round Gully Vent

## Description:

Solco Round Gully Vent is designed to effectively disperse passively vented gas safely into the atmosphere. The vents should be positioned near the building perimeter or in soft landscape.

In areas of vehicle traffic, the circular gully vent can be positioned underneath a gully grate to suit road traffic (design of bearing load to be approved by the engineer).

Stainless steel screws are provided with the stainless steel Holed Lid. Base connection should be to storm water collection, land drainage or soakaway system.




## Technical Data:

Property	Value
Gully Vent Wall Thickness	3mm
Unit Height (including gully vent)	690mm
Twinwall and Pipe Composite	420mm
<b>Holed Lid</b>	
Thickness	1.6mm
Hole Diameter	6mm
<b>Air Flow</b>	
S/Steel Holed Lid	7000mm <sup>2</sup>
Aluminium Slotted Lid	>7000mm <sup>2</sup>

## Installation:

Install around the perimeter of the building (grass verges, gravel beds, planter areas etc). Only for use in areas that sustain light foot traffic.

Correct Installations/specification should be sought from the specifier, ground engineers or the structural engineers to ensure the unit is suitable for the intended location.

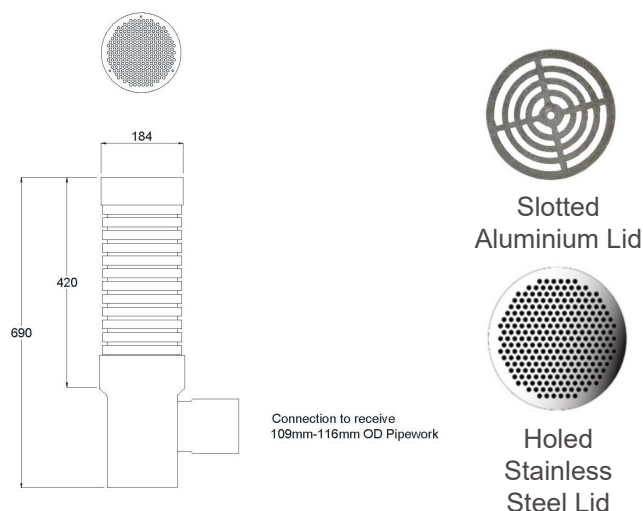

Solco, Unit 51, Portmanmoor Road Industrial Estate, Ocean Park, Cardiff, CF24 5HB