

Solco SBP-020 Rectangular Gully Vent

Description:

Solco Rectangular Gully Vent The Rectangular Gully Vent is designed to effectively disperse passively vented gas safely into the atmosphere. The vents should be used near the building perimeter or in soft landscape.

In areas of vehicle traffic, the rectangular gully vent can be positioned underneath a gully grate to suit road traffic (design of bearing load to be approved by the engineer).

Stainless steel screws are provided with the stainless steel Holed Lid. Base connection should be to storm water collection, land drainage or soakaway system.




Technical Data:

Property	Value
Gully Vent Wall Thickness Unit	4mm
Height (including gully vent)	720mm
Twinwall and Pipe Composite	450mm
Stainless Steel Lid (LxW)	420x210mm
Thickness	1.6mm
Hole Diameter	6mm
Air Flow	
S/Steel Holed Lid	6500mm ²
S/Steel Slotted Lid	18000mm ²

Installation:

Install around the perimeter of the building (grass verges, gravel beds, planter areas etc). Only for use in areas that sustain light foot traffic.

Correct Installations/specification should be sought from the specifier, ground engineers or the structural engineers to ensure the unit is suitable for the intended location.

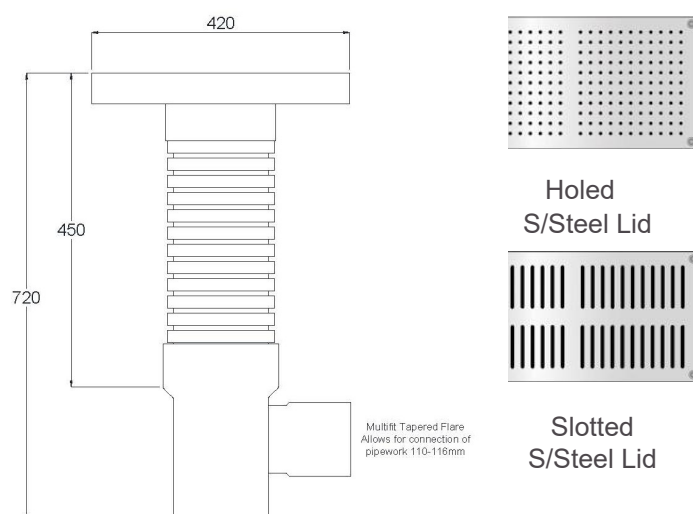

Solco, Unit 51, Portmanmoor Road Industrial Estate, Ocean Park, Cardiff, CF24 5HB